

UAPI Functions - SSL::delete_cert

Guide to UAPI

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Calls from the WHM API
- Custom UAPI Modules

Backup
Backup:: fullbacku
p_to_ftp

Backup:: fullbacku
p_to_homedir

Backup:: fullbacku
p_to_scp_with_key

Backup:: fullbacku
p_to_scp_with_pa
ssword

Backup:: list_back
ups

Bandwidth

Bandwidth:: get_e
nabled_protocols

Bandwidth:: get_re
tention_periods

Bandwidth:: query

Batch

Batch:: strict

Brand

Brand:: read

Branding

Branding:: file

Branding:: get_app
lications

Branding:: get_app
lication_informatio
n

Branding:: get_ava
ilable_applications

Branding:: get_info
rmation_for_applic
ations

Description

This function deletes an SSL certificate.

Note:

This function **only** deletes certificates from SSL storage. To end SSL coverage for a domain, use the UAPI function `SSL::delete_ssl` instead.

Examples

▼ cPanel or Webmail Session URL

```
https://hostname.exam  
ple.com:2083/cpsess##  
#####/execute/SSL/  
delete_cert?friendly_  
name=TestCert
```

Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

Func tion infor mati on

About this mod ule

The SSL module manages certificates, certificate requests, and keys on your server.

About t UAPI

UAPI accesses and modifies data for cPanel accounts.

- Branding:: image
- Branding:: include
- Branding:: spritelist
- CacheBuster:: read
 - CacheBuster:: update
- Chkserverd:: get_exim_ports
 - Chkserverd:: get_exim_ports_ssl
- Chrome:: get_dom
- Contactus:: is_enabled
- cPAddons:: get_available_addons
 - cPAddons:: get_instance_settings
 - cPAddons:: list_addon_instances
- cPGreyList:: disable_all_domains
 - cPGreyList:: disable_domains
 - cPGreyList:: enable_all_domains
 - cPGreyList:: enable_domains
 - cPGreyList:: has_greylisting_enabled
 - cPGreyList:: list_domains
- DAV:: disable_shared_global_addressbook
 - DAV:: enable_shared_global_addressbook
 - DAV:: get_calendar_contacts_config
 - DAV:: has_shared_global_addressbook
 - DAV:: is_dav_service_enabled

LiveAPI PHP Class

```

$cpnl = new
CPANEL(); // Connect
to cPanel - only do
this once.

// Delete the
TestCert certificate.
$SSL_delete_cert =
$cpnl->uapi(
    'SSL',
    'delete_cert',
    array(

        'friendly_name' =>
        'TestCert',
    )
);

```

Note:
For more information, read our [Guide to the LiveAPI System](#).

LiveAPI Perl Module

```

my $cpliveapi =
Cpanel::LiveAPI->new(
); # Connect to
cPanel - only do this
once.

# Delete the TestCert
certificate.
my $SSL_delete_cert =
$cpliveapi->uapi(
    'SSL',
    'delete_cert',
    {

        'friendly_name' =>
        'TestCert',
    }
);

```

Note:
For more information, read our [Guide to the LiveAPI System](#).

Notes:

- The *Fe*
- The *Ur*
- The *mu*
- The *us*
- The *20*
- The *or*
- The *20*
- The *20*
- The *or*
- The *20*
- The *).*

Find a function

- [SSL: install_ssl function](#)
- [UAPI Modules - Market — The Market module manages connections to cPanel Market providers.](#)

- DAV:: is_horde_enabled
- DCV
 - DCV:: check_domains_via_dns
 - DCV:: check_domains_via_http
 - DCV:: ensure_domains_can_pass_dcv
 - DomainInfo
 - DomainInfo:: domains_data
 - DomainInfo:: list_domains
 - DomainInfo:: main_domain_builtin_subdomain_aliases
 - DomainInfo:: single_domain_data
- DNS
 - DNS:: ensure_domains_reside_only_locally
 - DNS:: has_local_authority
- DNSSEC
 - DNSSEC:: disable_dnssec
 - DNSSEC:: enable_dnssec
 - DNSSEC:: fetch_dns_records
 - DNSSEC:: set_nsec3
 - DNSSEC:: unset_nsec3
- Email
 - Email:: account_name
 - Email:: add_auto_responder
 - Email:: add_domain_forwarder
 - Email:: add_forwarder
 - Email:: add_list
 - Email:: add_mailman_delegates
 - Email:: add_mx
 - Email:: add_pop
 - Email:: add_spam_filter

▼ cPanel Template Toolkit

```

<!-- Delete the
TestCert certificate.
-->
[% data = execute(
'SSL', 'delete_cert',
{ friendly_name =>
'TestCert' } ); %]
[% FOREACH q = data
%]
    <p>
        [% q %]
    </p>
[% END %]

```

Note:
For more information, read our [Guide to Template Toolkit documentation](#).

▼ Command Line

```

uapi --user=username
SSL delete_cert
friendly_name=TestCert

```

Notes:

- You **must** [URI-encode](#) values.
- username represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI documentation](#) or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```

/usr/local
/cpanel/bin/uapi

```

▼ Output (JSON)

```

{
    "messages": null,

```

- UAPI Functions - Market:cancel_pending_ssl_certificate — This function cancels an order and removes the polling for a pending certificate.
- UAPI Functions - Market:create_shopping_cart — This function creates a shopping cart with which the system sends an order to the cPanel Store.

Email: browse_mailbox
Email: change_mx
Email: check_fast_mail
Email: check_pipe_forwarder
Email: delete_auto_responder
Email: delete_do_main_forwarder
Email: delete_filter
Email: delete_forwarder
Email: delete_held_messages
Email: delete_list
Email: delete_mx
Email: delete_pop
Email: disable_filter
Email: disable_mailbox_autocreate
Email: disable_spam_assassin
Email: disable_spam_autodelete
Email: disable_spam_box
Email: dispatch_client_settings
Email: edit_pop_quota
Email: enable_filter
Email: enable_mailbox_autocreate
Email: enable_spam_assassin
Email: enable_spam_box
Email: fetch_charmaps
Email: fts_rescan_mailbox
Email: generate_mailman_opt
Email: get_auto_responder
Email: get_chase


```
"errors": null,  
"status": 1,  
"data": [  
  {  
    "is_self_signed":  
    "1",  
  
    "validation_type": "dv",  
  
    "signature_algorithm":  
    "sha256WithRSAEncryption",  
  
    "issuer.organization  
Name": "cPanel",  
    "modulus":  
    "a673c3b17344664b35f8  
791f562d3aea6bf4d8faa  
3ae3fc0a519380fd45396  
4a36677c34d48677ecb7f  
5ed035df026f5f0f8fbfe  
21745e52daf1f3b9e58c7  
3f0baefdb709320e2202e  
7d05250b051a59b30ff1f  
ef22d83d7140c1c81cea3  
14a0890ce8d2226799872  
181c58a74016c7aaa2cff  
5ac72b575cecde8f304aa  
572a2ea03d8b173ab76c6  
e8cdb9dfd0da81e1119ce  
fd4b8b4dbf0e46c7f1e  
e2fe8b5fd5504e58ccbc0  
d13b4fa41ecc9ebd0dabe  
1d1fec5c724f748167e7c  
0553e997f9b77eb36abce  
70973f06df151748d41b7  
58de3efd7afa6f2464a15  
47f5ff158469d96e248be  
464df9eda0e7ce854a893  
32a2c1278b17c425368a9  
604f454db", "  
  
    "subject.commonName":  
    "example.com",  
    "not_before":  
    "1365713671",  
  
    "modulus_length":  
    "2048",  
    "not_after":  
    "1397249671",
```

- UAPI Functions - Market: get_all_products - This function lists all products available through enabled cPanel Market providers.

ts
Email: get_client_settings
Email: get_default_email_quota
Email: get_default_email_quota_mib
Email: get_disk_usage
Email: get_filter
Email: get_held_message_count
Email: get_mailbox_autocreate
Email: get_mailman_delegates
Email: get_main_account_disk_usage
Email: get_main_account_disk_usage_bytes
Email: get_max_email_quota
Email: get_max_email_quota_mib
Email: get_pop_quota
Email: get_spam_settings
Email: get_webmail_settings
Email: has_delegated_mailman_lists
Email: has_plaintext_authentication
Email: hold_outgoing
Email: is_integer
Email: list_autoresponders
Email: list_default_address
Email: list_domain_forwarders
Email: list_filters
Email: list_filters_backups
Email: list_forwarders
Email: list_forward


```
"created":  
"1365713671",  
  "domains": [  
    "example.com"  
  ],  
  
"issuer.commonName":  
"example.com",  
  
"friendly_name":  
"TestCert",  
  "id":  
  "example_com_cb497_a3  
94d_1397249671_d1272d  
a8f13a1fd837493a5ad1f  
0a0f3"  
  }  
],  
  "metadata": {
```

ers_backups
 Email:: list_lists
 Email:: list_mail_domains
 Email:: list_mxns
 Email:: list_pops
 Email:: list_pops_with_disk
 Email:: list_system_filter_info
 Email:: passwd_list
 Email:: passwd_pop
 Email:: release_outgoing
 Email:: remove_mailman_delegates
 Email:: reorder_filters
 Email:: set_always_accept
 Email:: set_default_address
 Email:: set_list_privacy_options
 Email:: stats_db_status
 Email:: store_filter
 Email:: suspend_incoming
 Email:: suspend_login
 Email:: suspend_outgoing
 Email:: trace_filter
 Email:: unsuspend_incoming
 Email:: unsuspend_login
 Email:: unsuspend_outgoing
 Email:: verify_password
 EmailAuth
 EmailAuth:: disable_dkim
 EmailAuth:: enable_dkim
 EmailAuth:: ensure_dkim_keys_exist

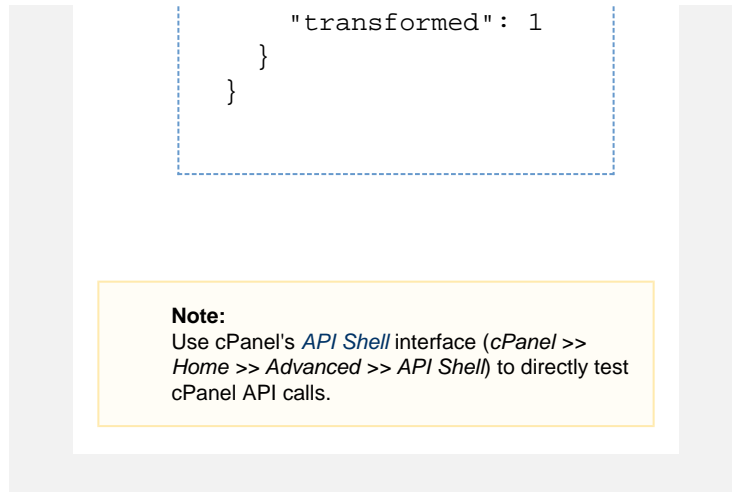

Parameters

You **must** include one of the following parameters:

Parameter	Type	Description	Possible values	Example
id	string	The certificate's ID.	A valid string.	Click to view... 
friendly_name	string	The certificate's friendly name.	A valid string.	TestCert

Returns

Return	Type	Description	Possible values	Example
is_self_signed	Boolean	Whether the certificate is self-signed.	<ul style="list-style-type: none"> 1 — Self-signed. 0 — Not self-signed. 	1

EmailAuth:: fetch_dkim_private_keys

EmailAuth:: install_dkim_private_keys

EmailAuth:: install_spf_records

EmailAuth:: validate_current_dkims

EmailAuth:: validate_current_ptrs

EmailAuth:: validate_current_spfs

ExternalAuthentication

ExternalAuthentication:: add_authn_link

ExternalAuthentication:: configured_modules

ExternalAuthentication:: get_authn_links

ExternalAuthentication:: has_external_auth_modules_configured

ExternalAuthentication:: remove_authn_link

Features

Features:: get_feature_metadata

Features:: has_feature

Features:: list_features

Fileman

Fileman:: autocompletedir

Fileman:: empty_trash

Fileman:: get_file_content

Fileman:: get_file_information

Fileman:: list_files

Fileman:: save_file_content

Fileman:: transcoding

Fileman:: upload_files

validation_type	string	The certificate's validation type. Note : We introduced this return in cPanel & WHM version 56.	<ul style="list-style-type: none"> ev — Extended Validation. ov — Organization Validation. dv — Domain Validation. undef — The system could not parse and determine the certificate's validation type. 	dv
signature_algorithm	string	The signature algorithm of the certificate. Note : We introduced this return in cPanel & WHM version 56.	A valid OID hash algorithm name.	sha256withRSAEncryption
issuer.organizationName	string	The certificate's organization name.	A valid string.	Organization

- Ftp:: add_ftp
 - Ftp:: allows_anonymous_ftp
 - Ftp:: allows_anonymous_ftp_incoming
 - Ftp:: delete_ftp
 - Ftp:: ftp_exists
 - Ftp:: get_ftp_daemon_info
 - Ftp:: get_port
 - Ftp:: get_quota
 - Ftp:: get_welcome_message
 - Ftp:: kill_session
 - Ftp:: list_ftp
 - Ftp:: list_ftp_with_disk
 - Ftp:: list_sessions
 - Ftp:: passwd
 - Ftp:: server_name
 - Ftp:: set_anonymous_ftp
 - Ftp:: set_anonymous_ftp_incoming
 - Ftp:: set_homedir
 - Ftp:: set_quota
 - Ftp:: set_welcome_message
 - Integration
 - Integration:: fetch_url
 - KnownHosts
 - KnownHosts:: create
 - KnownHosts:: delete
 - KnownHosts:: update
 - KnownHosts:: verify
 - LangPHP
 - LangPHP:: php_get_domain_handler
 - LangPHP:: php_get_impacted_domains
 - LangPHP:: php_get_installed_version

modulus	<i>string</i>	The certificate's modulus.	A valid string.	<ul style="list-style-type: none"> <ul style="list-style-type: none"> <ul style="list-style-type: none"> Click to view... a74f7636 fa6ac93e e6836a83 a995b55d eb5019ea 36d7ba3d afb00e38 d693acdb 0c81b2ff 777d6b43 3a420fae 523f127f 352a68bc c8b8f2d6 ee7b7039 5bafabd8 237ada81 64fddd8 376b3037 5c35d4d4 cbcce7d3 3d08069c 17b40917 6a3689f1 ebc97c0b 08fe6ae4 4c19a92a c6d68448 e7f1d13f 3b360aff d4222a51 b4f35342 de99b5a1 fb5548e4 38f2d824 664562a4 48002eed 7fce24de dc7dc3e1 ed179973 d1dae959 b33716ee b410d172 708954e0 0632cbf6 0a0e2641 9860c8c0 bc285d6b fe4b479d e0dd1897 72a5dae6 76bd2a92 acccc136 9821be8c ffddd8a7 e6ecc061 f8a32a9a e0661e4e 946ed8e3 827b2771 38d3a761 16567cbd 129cbd86 9ef9ddd8
subject.commonName	<i>string</i>	The certificate's common name.	A valid domain.	example.com
not_before	<i>string</i>	When the certificate started.	A date in Unix time format.	1365713671
modulus_length	<i>string</i>	The length of the certificate's modulus.	A positive integer.	2048

S

LangPHP:: php_get_system_default_version

LangPHP:: php_get_vhost_versions

LangPHP:: php_ini_get_user_basic_directives

LangPHP:: php_ini_get_user_content

LangPHP:: php_ini_get_user_paths

LangPHP:: php_ini_set_user_basic_directives

LangPHP:: php_ini_set_user_content

LangPHP:: php_set_vhost_versions

not_after	string	When the certificate expired.	A date in Unix time format.	1397249671
created	string	When the certificate was created.	A date in Unix time format.	1365713671
domains	array	The domains that the certificate covers.	A valid domain or domains.	example.com
issuer.commonName	string	The name that issued the certificate.	Usually, a valid domain.	example.com
friendly_name	string	The certificate's friendly name.	A valid string.	TestCert
id	string	The certificate's ID.	A valid string.	example_com_cb497_a394d_1397249671_d1272da8f13a1fd837493a5ad1f0a0f3

▼ LastLogin

LastLogin:: get_last_or_current_logged_in_ip

▼ Locale

Locale:: get_attributes

▼ Mailboxes

Mailboxes:: expunge_mailbox_messages

Mailboxes:: expunge_messages_for_mailbox_guid

Mailboxes:: get_mailbox_status

Mailboxes:: has_utf8_mailbox_names

Mailboxes:: set_utf8_mailbox_names

▼ Market

Market:: cancel_pending_ssl_certificate

Market:: create_shopping_cart

Market:: get_all_products

Market:: get_certificate_status_details

Market:: get_login_url

Market:: get_pending_ssl_certificates

Market:: get_provider_specific_dcv_constraints

Market:: get_providers_list

Market:: get_ssl_certificate_if_available

Market:: process_ssl_pending_queue

Market:: request_ssl_certificates

Market:: set_status_of_pending_queue_items

Market:: set_url_after_checkout

Market:: validate_login_token

▼ Mime

Mime:: add_handler

Mime:: add_hotlink

Mime:: add_mime

Mime:: add_redirect

Mime:: delete_handler

Mime:: delete_hotlink

Mime:: delete_mime

Mime:: delete_redirect

Mime:: list_handlers

Mime:: list_hotlinks

Mime:: list_mime

Mime:: list_redirects

Mime:: redirect_info

▼ ModSecurity

ModSecurity:: disable_all_domains

ModSecurity:: disable_domains

ModSecurity:: enable_all_domains

ModSecurity:: enable_domains

ModSecurity:: has
_modsecurity_inst
alled

ModSecurity:: list_
domains

▼ Mysql

Mysql:: add_host

Mysql:: add_host_
note

Mysql :: check_dat
abase

Mysql:: create_dat
abase

Mysql:: create_use
r

Mysql:: delete_dat
abase

Mysql:: delete_hos
t

Mysql:: delete_use
r

Mysql:: get_host_n
otes

Mysql:: get_privile
ges_on_database

Mysql:: get_restrict
ions

Mysql:: get_server_
_information

Mysql:: locate_ser
ver

Mysql:: rename_d
atabase

Mysql:: rename_us
er

Mysql:: repair_dat
abase

Mysql:: revoke_ac
cess_to_database

Mysql:: set_passw
ord

Mysql:: set_privile
ges_on_database

▼ Notifications

Notifications:: get_
notifications_count

▼ NVData

NVData:: get

NVData:: set

▼ Parser

Parser:: firstfile_rel
ative_uri

- ▼ PassengerApps
 - PassengerApps:: disable_application
 - PassengerApps:: edit_application
 - PassengerApps:: enable_application
 - PassengerApps:: ensure_deps
 - PassengerApps:: list_applications
 - PassengerApps:: register_application
 - PassengerApps:: unregister_application
- ▼ PasswdStrength
 - PasswdStrength:: get_required_strength
- ▼ Personalization
 - Personalization::set
 - Personalization::get
- ▼ Postgresql
 - Postgresql:: create_database
 - Postgresql:: create_user
 - Postgresql:: delete_database
 - Postgresql:: get_restrictions
 - Postgresql:: grant_all_privileges
 - Postgresql:: rename_database
 - Postgresql:: rename_user
 - Postgresql:: rename_user_no_password
 - Postgresql:: revoke_all_privileges
 - Postgresql:: set_password
- ▼ Pushbullet
 - Pushbullet:: send_test_message
- ▼ Quota
 - Quota:: get_quota_info

- ▼ Resellers
 - Resellers:: list_accounts
- ▼ ResourceUsage
 - ResourceUsage:: get_usages
- ▼ Restore
 - Restore:: directory_listing
 - Restore:: get_users
 - Restore:: query_file_info
 - Restore:: restore_file
- ▼ Session
 - Session:: create_temp_user
- ▼ SiteTemplates
 - SiteTemplates:: list_site_templates
 - SiteTemplates:: list_user_settings
 - SiteTemplates:: publish
- ▼ SpamAssassin
 - SpamAssassin :: clear_spam_box
 - SpamAssassin:: get_symbolic_test_names
 - SpamAssassin:: get_user_preferences
 - SpamAssassin:: update_user_preference
- ▼ SSH
 - SSH:: get_port
- ▼ SSL
 - SSL:: add_autossl_excluded_domains
 - SSL:: can_ssl_redirect
 - SSL:: check_shared_cert
 - SSL:: delete_cert
 - SSL:: delete_csr
 - SSL:: delete_key
 - SSL:: delete_ssl
 - SSL :: disable_mail_sni

SSL:: enable_mail
_sni

SSL:: fetch_best_f
or_domain

SSL:: fetch_cert_in
fo

SSL:: fetch_certific
ates_for_fqdns

SSL:: fetch_key_a
nd_cabundle_for_
certificate

SSL:: find_certifica
tes_for_key

SSL:: find_csrs_for
_key

SSL:: generate_ce
rt

SSL:: generate_cs
r

SSL:: generate_ke
y

SSL:: get_autossl_
excluded_domains

SSL:: get_autossl_
pending_queue

SSL:: get_autossl_
problems

SSL:: get_cabundl
e

SSL:: get_cn_nam
e

SSL:: install_ssl

SSL:: installed_ho
st

SSL:: installed_ho
sts

SSL:: is_autossl_c
heck_in_progress

SSL:: is_mail_sni_
supported

SSL:: is_sni_supp
orted

SSL:: list_certs

SSL:: list_csrs

SSL:: list_keys

SSL:: list_ssl_item
s

SSL:: mail_sni_sta
tus

SSL:: rebuild_mail
_sni_config

SSL:: rebuildssldb

SSL:: remove_aut
ossl_excluded_do
mains

SSL:: set_autossl_
excluded_domains

SSL:: set_cert_frie
ndly_name

SSL:: set_csr_frien
dly_name

SSL:: set_key_frie
ndly_name

SSL:: set_primary
_ssl

SSL:: set_ssl_shar
e

SSL:: show_cert

SSL:: show_csr

SSL:: show_key

SSL:: start_autossl_
_check

SSL:: toggle_ssl_r
edirects_for_doma
ins

SSL:: upload_cert

SSL:: upload_key

▼ StatsBar

StatsBar:: get_stat
s

▼ Styles

Styles:: current

Styles:: list

Styles:: set_default

Styles:: update

▼ SubDomain

SubDomain:: adds
ubdomain

▼ Themes

Themes:: get_the
me_base

Themes:: list

Themes:: update

▼ Tokens

Tokens:: create_fu
ll_access

Tokens:: list

Tokens:: rename

Tokens:: revoke

▼ TwoFactorAuth

TwoFactorAuth:: generate_user_configuration

TwoFactorAuth:: get_user_configuration

TwoFactorAuth:: remove_user_configuration

TwoFactorAuth:: set_user_configuration

▼ UserManager

UserManager:: check_account_conflicts

UserManager:: create_user

UserManager:: delete_user

UserManager:: dismiss_user

UserManager:: edit_user

UserManager:: list_users

UserManager:: lookup_service_account

UserManager:: lookup_user

UserManager:: merge_service_account

UserManager:: unlink_service_account

▼ UserTasks

UserTasks:: delete

UserTasks:: retrieve

▼ VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

▼ VersionControlDeployment

VersionControlDeployment:: create

VersionControlDeployment:: delete

VersionControlDeployment:: retrieve

▼ WebDisk

WebDisk:: delete_user

WebDisk:: set_homedir

WebDisk:: set_password

WebDisk:: set_permissions

▼ WebmailApps

WebmailApps:: list_webmailapps

▼ WebVhosts

WebVhost:: list_domains

WebVhost:: list_ssl_capable_domains

▼ WordPressBackup

WordPressBackup:: any_running

WordPressBackup:: cancel

WordPressBackup:: cleanup

WordPressBackup:: get_available_backups

WordPressBackup:: is_running

WordPressBackup:: start

▼ WordPressInstance

Manager

WordPressInstanceManager:: cancel_scan

WordPressInstanceManager:: cleanup_scan

WordPressInstanceManager:: change_admin_password

WordPressInstanceManager:: configure_autoupdate

WordPressInstanceManager:: get_api_version

WordPressInstanceManager:: get_in

stance_by_id

WordPressInstanceManager::get_instances

WordPressInstanceManager::get_latest_wordpress_version_from_wordpress_org

WordPressInstanceManager::get_scan_results

WordPressInstanceManager::is_installable_addon_available

WordPressInstanceManager::start_scan

▼ WordPressRestore

WordPressRestore::any_running

WordPressRestore::cleanup

WordPressRestore::start