

UAPI Functions - SSL::show_cert

Guide to UAPI

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Calls from the WHM API
- Custom UAPI Modules

- Backup
- Backup::fullbackup_to_ftp
- Backup::fullbackup_to_homedir
- Backup::fullbackup_to_scp_with_key

- Backup::fullbackup_to_scp_with_password
- Backup::list_backups

- Bandwidth
- Bandwidth::get_enabled_protocols
- Bandwidth::get_retention_periods
- Bandwidth::query

- Batch
- Batch::strict

- Brand
- Brand::read

- Branding
- Branding::file
- Branding::get_applications
- Branding::get_application_information
- Branding::get_available_applications
- Branding::get_info

Description

This function retrieves a certificate.

Examples

▼ cPanel or Webmail Session URL

```
https://hostname.example.com:2083/cpsess#####/execute/SSL/show_cert?friendly_name=TestCert
```

▼

Note:

This example calls the UAPI function via a cPanel session. For more information, read our [Guide to UAPI](#) documentation.

▼ LiveAPI PHP Class

```
$cpanel = new CPANEL(); // Connect to cPanel - only do this once.  
  
// Retrieve the certificate  
"TestCert"  
$SSL_show_cert = $cpanel->uapi('SSL', 'show_cert', array('friendly_name' => 'TestCert', ));
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

Function information

About this module

The SSL module manages certificates, certificate requests, and keys on your server.

About UAPI

UAPI accesses and modifies data for cPanel accounts.

information_for_applications

Branding:: image

Branding:: include

Branding:: spritelist

CacheBuster

CacheBuster:: read

CacheBuster:: update

Chkserverd

Chkserverd:: get_exim_ports

Chkserverd:: get_exim_ports_ssl

Chrome

Chrome:: get_domain

Contactus

Contactus:: is_enabled

cPAddons

cPAddons:: get_available_addons

cPAddons:: get_instance_settings

cPAddons:: list_addon_instances

cPGreyList

cPGreyList:: disable_all_domains

cPGreyList:: disable_domains

cPGreyList:: enable_all_domains

cPGreyList:: enable_domains

cPGreyList:: has_greylisting_enabled

cPGreyList:: list_domains

DAV

DAV:: disable_shared_global_addressbook

DAV:: enable_shared_global_addressbook

DAV:: get_calendar_contacts_config

DAV:: has_shared_global_addressbook

LiveAPI Perl Module

```
my $cpliveapi =  
Cpanel::LiveAPI->new(  
); # Connect to  
cPanel - only do this  
once.
```

```
# Retrieve the  
certificate  
"TestCert"  
my $$SSL_show_cert =  
$cpliveapi->uapi(  
  'SSL',  
  'show_cert', {  
  
    'friendly_name'  
=> 'TestCert',  
  }  
);
```

Note:

For more information, read our [Guide to the LiveAPI System](#).

cPanel Template Toolkit

```
<!-- Retrieve the  
certificate  
"TestCert" -->  
[% data = execute(  
  'SSL', 'show_cert', {  
    friendly_name =>  
    'TestCert' } )]; %]  
[% FOREACH q = data  
  %]  
  <p>  
    [% q %]  
  </p>  
[% END %]
```

Note:

For more information, read our [Guide to Template Toolkit documentation](#).

Notes:

- The `Fe`
- The `int`
- The `Ur`
- The `mu`
- The `us`
- The `20`
- The `or`
- The `20`
- The `20`
- The `or`
- The `20`
- The `20`

Find a function

SSL:
:ins
tall
_ssl
functi
on.

- UAPI Modules - Market — The Market module manages connections to cPanel Market providers.

DAV:: is_dav_service_enabled

DAV:: is_horde_enabled

▼ DCV

DCV:: check_domains_via_dns

DCV:: check_domains_via_http

DCV:: ensure_domains_can_pass_dcv

▼ DomainInfo

DomainInfo:: domains_data

DomainInfo:: list_domains

DomainInfo:: main_domain_builtin_subdomain_aliases

DomainInfo:: single_domain_data

▼ DNS

DNS:: ensure_domains_reside_only_locally

DNS:: has_local_authority

▼ DNSSEC

DNSSEC:: disable_dnssec

DNSSEC:: enable_dnssec

DNSSEC:: fetch_dns_records

DNSSEC:: set_nsec3

DNSSEC:: unset_nsec3

▼ Email

Email:: account_name

Email:: add_auto_responder

Email:: add_domain_forwarder

Email:: add_forwarder

Email:: add_list

Email:: add_mailman_delegates

Email:: add_mx

Email:: add_pop

▼ Command Line

```
uapi --user=username
SSL show_cert
friendly_name=TestCert
```

Notes:

- You **must** URI-encode values.
- `username` represents your account-level username.
- For more information and additional output options, read our [Guide to UAPI](#) documentation or run the `uapi --help` command.
- If you run CloudLinux™, you **must** use the full path of the `uapi` command:

```
/usr/local
/cpanel/bin/uapi
```

▼ Output (JSON)

```
{
  "messages": null,
  "errors": null,
  "status": 1,
  "data": {
    "cert":
    "-----BEGIN
    CERTIFICATE-----
    MIIDcTCCAImGAWIBAgIFA
    U+BNVgwDQYJKoZIhvcNAQ
    EFBQAwUTESMBAGA1UEAww
    J
    c2lza28udGxkMQswCQYDV
    QQGEwJVUzEPMA0GA1UECg
    wGY1BhbmVsMQswCQYDVQQ
    I
    DAJUWDEQMA4GA1UEBwwHS
    G91c3RvbG91c3RvbG91c3
    YyMjI2MTlaFw0xNTEwMDY
    Y
    MjI2MTlaMFExejaQBGNVB
    AMMCXNpc2tvLnRsc2ZELMA
    kGA1UEBhmCVVMxZDzANBgN
    V
```

- UAPI Functions - Market:cancel_pending_ssl_certificate — This function cancels an order and removes the polling for a pending certificate.
- UAPI Functions - Market:create_shopping_cart — This function creates a shopping cart with which the system sends an order to the cPanel Store .

Email:: add_spam_filter
Email:: browse_mailbox
Email:: change_mx
Email:: check_fastmail
Email:: check_pipe_forwarder
Email:: delete_auto_responder
Email:: delete_do_main_forwarder
Email:: delete_filter
Email:: delete_forwarder
Email:: delete_held_messages
Email:: delete_list
Email:: delete_mx
Email:: delete_pop
Email:: disable_filter
Email:: disable_mailbox_autocreate
Email:: disable_spam_assassin
Email:: disable_spam_autodelete
Email:: disable_spam_box
Email:: dispatch_client_settings
Email:: edit_pop_quota
Email:: enable_filter
Email:: enable_mailbox_autocreate
Email:: enable_spam_assassin
Email:: enable_spam_box
Email:: fetch_charmaps
Email:: fts_rescan_mailbox
Email:: generate_mailman_otp
Email:: get_auto_r

BAoMBmNQYW51bDELMAkGA1UECAwCVFgxEADA0BgNVBAcMB0hvdXN0b24wgGEiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQC9zx6zGiHdmWA0dKtoXmJiWXpZ9E3P
Xx3YHsjFEWW7e5pH0vZ+jVMzDmm5nsJ7RXrAkZO1IvpIpVLvoQfiJOWVvkD+o9FW
voK1tWJS72FSgPju+58mA2ieBuc87A790Pzuv1P3NR3zFLAJUR99zkHR1fpri/da
M3PBW08ET48FWkyU1kOeZaU1F67/+wrEiNgg+t1qhKOCAB61PdNVkLaSGHimksu
C
+Czk8Kq9nuS0E0TCnDtjjEyJ455FUcaCfcz1Tb8xkB/F90Re74yTzD+v1k0tFMG6
PLj/ajIwWqw00qmQ8wX3NRxkWGz5kVO1wrVJarKQ5EYQ3/mgvit0v6dAgMBAAGj
UDBOMB0GA1UdDgQWBBRw+wKBo34+bgexjAa3EMDsgSCd7zAfBgNVHSMEGDAWgBRw
+wKBo34+bgexjAa3EMDsgSCd7zAMBgnVHRMEBTADAQH/MA0GCSqGSIb3DQEBBQUA
A4IBAQRXIs53opzKM2rM8Qe8lcw524WK6hgy2EWZHp78N7rU7/6DQ/I3hv3Wh
cDDIO04I2/Xhe88MLBaLoM367Ya+vy7CaLr14aLi/SfQsZMA0ALBvMao+Fis0iVw
FYq/NLgSXw+fgnpFskt8v8iQZ+4Kaal8U8e9sVgu8m0Rg07rzymleRiIKpsKd1rh
/SD7LbSN7M7TRL3QqF71tw9sQhAAsQcRaBBF21pdWrqhiGZ+Eioo3hhgwNavH2a
g
qz78ddHwrFpHFwrEeUk10

- UAPI Functions - Market: get_all_products — This function lists all products available through enabled Panel Market providers.

esponder
Email: get_charts
Email: get_client_settings
Email: get_default_email_quota
Email: get_default_email_quota_mib
Email: get_disk_usage
Email: get_filter
Email: get_held_message_count
Email: get_mailbox_autocreate
Email: get_mailman_delegates
Email: get_main_account_disk_usage
Email: get_main_account_disk_usage_bytes
Email: get_max_email_quota
Email: get_max_email_quota_mib
Email: get_pop_quota
Email: get_spam_settings
Email: get_webmail_settings
Email: has_delegated_mailman_lists
Email: has_plaintext_authentication
Email: hold_outgoing
Email: is_integer
Email: list_auto_responders
Email: list_default_address
Email: list_domain_forwarders
Email: list_filters
Email: list_filters_backups
Email: list_forward

```
fpPb76MYIce7xIy/4oQNdg6fOq4l/FrajBv+WkzDVP
a
Km6r7YmwfLN/YMZBHXSRS5
8oOGP9W
-----END
CERTIFICATE-----",
    "text":
    "Certificate:\n
    Data:\n  Version: 3
    (0x2)\n  Serial
    Number:\n
    d1:e8:74:8c:d0:69:d2:
    55\n
        Signature
        Algorithm:
        sha1WithRSAEncryption
        \n  Issuer: CN =
        example.com, C = US,
        emailAddress =
        username@example.com,
        O = Example, ST =
        Texas, L =
        Houston\n  Validity\n
        Not Before: Apr
        10 22:38:10 2013
        GMT\n  Not After : Apr
        10 22:38:10 2014
        GMT\n
        Subject: CN =
        example.com, C = US,
        emailAddress =
        username@example.com,
        O = Example, ST =
        Texas, L = Houston\n
        Subject Public
        Key Info:\n  Public
        Key Algorithm:
        rsaEncryption\n
        Public-Key: (2048
        bit)\n  Modulus:\n
        00:c6:9c:e3:37:1a:fc:
        e6:1b:e4:29:4d:8e:ee:
        ec:\n  bd:7a:52:12:ef:
        34:71:64:77:e0:79:76:
        6d:ba:f0:\n
        77:fd:f0:92:18:b0:84:
        c3:f7:12:3a:a9:b9:1d:
        16:\n
        6c:a0:10:6d:f0:55:17:
        35:27:ff:81:a7:46:e6:
```

| | |
|----------------------------------|--|
| ers | d4:\n |
| Email:: list_forward_ers_backups | 36:97:34:01:3a:2f:6d:61:9a: |
| Email:: list_lists | 04:20:e3:fd:06:11:\n |
| Email:: list_mail_domains | 8b:a4:5e:4f:6d:0d:93:8e:3b:cc:cb:19:b3:cb:74:\n |
| Email:: list_mx | |
| Email:: list_pops | |
| Email:: list_pops_with_disk | 7a:54:82:ae:52:9e:46:31:7a:02:44:0b:7b:26:e8:\n |
| Email:: list_system_filter_info | 84:aa:91:2b:25:c1:42:0c:cc:5d:c4:d5:c4:cf:df:\n |
| Email:: passwd_list | |
| Email:: passwd_pop | |
| Email:: release_outgoing | de:4c:7c:22:99:ab:06:79:99:16:1e:a7:49:5b:9b:\n |
| Email:: remove_mailman_delegates | 89:97:18:3c:1e:4b:c6:c5:b5:b2:9d:7d:be:b9:91:\n |
| Email:: reorder_filters | |
| Email:: set_always_accept | c6:08:38:7d:dc:81:18:2b:0c:2c:da:29:f4:aa:a2:\n |
| Email:: set_default_address | 72:46:d9:c2:68:31:89:51:ab:32:af:7a:8d:9b:a7:\n |
| Email:: set_list_privacy_options | |
| Email:: stats_db_status | d8:b8:b5:37:21:03:91:1d:4e:d8:fc:f1:0e:1f:96:\n |
| Email:: store_filter | |
| Email:: suspend_incoming | 17:d6:90:25:c1:3a:1a:76:4c:9e:2b:7e:b9:9c:f5:\n |
| Email:: suspend_login | 86:0a:cf:ea:2f:eb:bc:33:ee:69:49:b9:c2:e6:a0:\n |
| Email:: suspend_outgoing | ef:ee:90:19:4a:2a:64:7e:ef:96:46:7e:7d:e2:35:\n |
| Email:: trace_filter | |
| Email:: unsuspend_incoming | |
| Email:: unsuspend_login | |
| Email:: unsuspend_outgoing | ec:d9:cf:34:42:7a:3d:c1:22:b9:68:a2:b3:02:a3:\n 7f:f5\n |
| Email:: verify_password | Exponent: 65537 (0x10001)\n X509v3 extensions:\n X509v3 Subject Key Identifier: \n 6A:A1:EA:62:FB:B2:C4:AC:04:B0:43:DD:56:BE: |
| ▼ EmailAuth | |
| EmailAuth:: disable_dkim | |
| EmailAuth:: enable_dkim | |

```
EmailAuth:: ensure
_dkim_keys_exist

EmailAuth:: fetch_
dkim_private_keys

EmailAuth:: install
_dkim_private_key
s

EmailAuth:: install
_spf_records

EmailAuth:: validat
e_current_dkims

EmailAuth:: validat
e_current_ptrs

EmailAuth:: validat
e_current_spfs

ExternalAuthenticat
ion
  ExternalAuthentica
tion:: add_authn_li
nk

  ExternalAuthentica
tion:: configured_
modules

  ExternalAuthentica
tion:: get_authn_lin
ks

  ExternalAuthentica
tion:: has_external
_auth_modules_co
nfigured

  ExternalAuthentica
tion:: remove_auth
n_link

Features
  Features:: get_feat
ure_metadata

  Features:: has_fea
ture

  Features:: list_feat
ures

Fileman
  Fileman:: autocom
pletedir

  Fileman:: empty_tr
ash

  Fileman:: get_file_
content

  Fileman:: get_file_i
nformation

  Fileman:: list_files

  Fileman:: save_file
_content

  Fileman:: transcod
e
```

```
8A:8D:FA:16:D3:F4\n
      X509v3 Authority
Key Identifier: \n
keyid:6A:A1:EA:62:FB:
B2:C4:AC:04:B0:43:DD:
56:BE:8A:8D:FA:16:D3:
F4\n\n
      X509v3 Basic
Constraints: \n
CA:TRUE\n Signature
Algorithm:
sha1WithRSAEncryption
\n

3c:1e:f7:3d:20:1b:a2:
bd:5c:d6:0f:2a:9e:f3:
b0:83:bf:a9:\n
a0:90:9b:96:b1:a6:1e:
8b:be:7c:f5:72:58:a0:
48:3e:68: 43:\n

06:37:63:0a:cb:9c:23:
98:c6:9e:f1:73:e8:4b:
71:ac:07:fc:\n
d0:5c:e1:55:4f:be:a7:
75:5a:57:da:a1:c2:46:
63:8f:3a:70:\n

4c:42:3c:03:4c:a0:47:
a3:fc:
ae:15:03:25:a5:78:63:
a2:73:\n
cd:47:d5:64:7c:d4:f5:
85:f7:03:b8:b4:d8:95:
75:6a:78:5c:\n

e6:c7:69:02:7b:a4:fc:
4d:8c:80:7b:c7:1c:71:
04:ba:53:71:\n 7a:
ce:00:cb:0e:5e:21:89:
02:ba:90:02:8e:b5:79:
8e:84:50:\n

b0:21:63:b0:ac:19:80:
c5:1d:a2:95:68:b7:ee:
35:10:fa:db:\n
f5:bf:b0:16:b1:34:76:
f2:d6:ee:07:3b:6d:b6:
0c:1d:b4:e5:\n

53:50:23:b8:c4:bf:fe:
d6:77:ec:89:68:a0:d8:
dd:f4:f5:fa:\n
```

Fileman:: upload_files

- ▼ Ftp
 - Ftp:: add_ftp
 - Ftp:: allows_anonymous_ftp
 - Ftp:: allows_anonymous_ftp_incoming
 - Ftp:: delete_ftp
 - Ftp:: ftp_exists
 - Ftp:: get_ftp_daemon_info
 - Ftp:: get_port
 - Ftp:: get_quota
 - Ftp:: get_welcome_message
 - Ftp:: kill_session
 - Ftp:: list_ftp
 - Ftp:: list_ftp_with_disk
 - Ftp:: list_sessions
 - Ftp:: passwd
 - Ftp:: server_name
 - Ftp:: set_anonymous_ftp
 - Ftp:: set_anonymous_ftp_incoming
 - Ftp:: set_homedir
 - Ftp:: set_quota
 - Ftp:: set_welcome_message
- ▼ Integration
 - Integration:: fetch_url
- ▼ KnownHosts
 - KnownHosts:: create
 - KnownHosts:: delete
 - KnownHosts:: update
 - KnownHosts:: verify
- ▼ LangPHP
 - LangPHP:: php_get_domain_handler
 - LangPHP:: php_get_impacted_domains

```
7d:f6:c4:72:02:b1:e8:
87:f7:e1:16:71:80:2e:
e7:94:7b:eb:\n

c6:a7:07:36:05:6d:34:
b4:25:74:e9:c2:2c:9e:
3d:bc:97:8e:\n
84:ce:cc:4f:1f:11:67:
ad:30:f6:83:3e:be:bb:
88:48:10:65:\n
    f7:4b:2f:80\n",
    "details": {

"is_self_signed": 1,

"validation_type": "dv
",

"signature_algorithm"
:"sha256WithRSAEncryp
tion",
    "subject": {
        "commonName":
"example.com",

"stateOrProvinceName"
: "Texas",

"organizationName":
"Example",

"emailAddress":
"username@example.com
",

"countryName": "US",

"localityName":
"Houston"
    },
    "modulus": "THE
MODULUS INFORMATION",
    "issuer": {
        "commonName":
"example.com",

"stateOrProvinceName"
: "Texas",

"organizationName":
"Example",

"emailAddress":
```


LangPHP:: php_get_installed_versions

LangPHP:: php_get_system_default_version

LangPHP:: php_get_vhost_versions

LangPHP:: php_ini_get_user_basic_directives

LangPHP:: php_ini_get_user_content

LangPHP:: php_ini_get_user_paths

LangPHP:: php_ini_set_user_basic_directives

LangPHP:: php_ini_set_user_content

LangPHP:: php_set_vhost_versions

▼ LastLogin

LastLogin:: get_last_or_current_logged_in_ip

▼ Locale

Locale:: get_attributes

▼ Mailboxes

Mailboxes:: expunge_messages

Mailboxes:: expunge_messages_for_mailbox_guid

Mailboxes:: get_mailbox_status

Mailboxes:: has_utf8_mailbox_names

Mailboxes:: set_utf8_mailbox_names

▼ Market

Market:: cancel_pending_ssl_certificate

Market:: create_shopping_cart

Market:: get_all_products

Market:: get_certificate_status_details

Market:: get_login_url

```
"username@example.com",
"countryName": "US",
"localityName":
"Houston"
},
"not_before":
1365633490,
"not_after":
1397169490,
"domains": [
"example.com"
],
"key_algorithm":
"rsaEncryption",
"id":
"example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788acff041",
"friendly_name":
"TestCert"
}
}
```

Market:: get_pending_ssl_certificates

Market:: get_provider_specific_dcv_constraints

Market:: get_providers_list

Market:: get_ssl_certificate_if_available

Market:: process_ssl_pending_queue

Market:: request_ssl_certificates

Market:: set_status_of_pending_queue_items

Market:: set_url_after_checkout

Market:: validate_login_token

▼ Mime

Mime:: add_handler

Mime:: add_hotlink

Mime:: add_mime

Mime:: add_redirect

Mime:: delete_handler

Mime:: delete_hotlink

Mime:: delete_mime

Mime:: delete_redirect

Mime:: list_handlers

Mime:: list_hotlinks

Mime:: list_mime

Mime:: list_redirects


Mime:: redirect_info

▼ ModSecurity

ModSecurity:: disable_all_domains

ModSecurity:: disable_domains

ModSecurity:: enable_all_domains

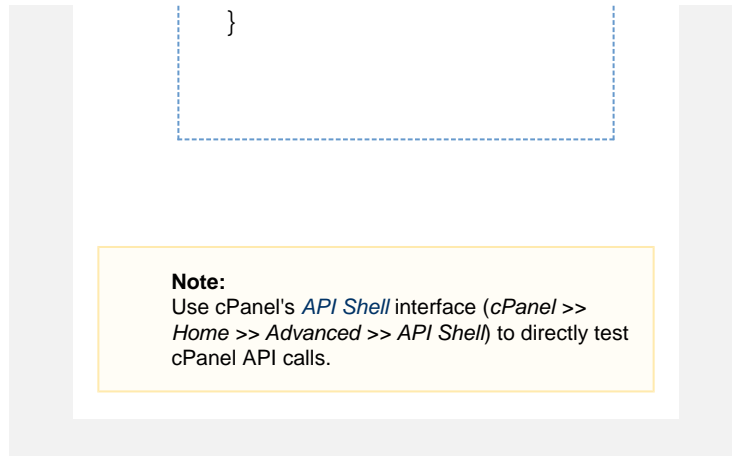

Parameters

Note: You **must** include one of the following parameters:

| Parameter | Type | Description | Possible values | Example |
|---------------|--------|----------------------------------|-----------------|---|
| id | string | The certificate's ID. | A valid string. | example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041 |
| friendly_name | string | The certificate's friendly name. | A valid string. | TestCert |

Returns

| Return | Type | Description | Possible values | Example |
|--------|--------|----------------------------------|--|--|
| cert | string | The contents of the certificate. | A valid certificate file in Base64 PEM format. | <p>▼ Click to view...</p> <pre>-----BEGIN CERTIFICATE ----- MIIDcTCCAIm gAwIBAgIFAU +BNVgwdQYJK oZIHvcNAQEF BQAwUTESMBA GA1UEAwJ c2lza28udGx kMQswCQYDVQ QGEwJVUzEPM A0GA1UECgwg Y1BhbmVsMQs wCQYDVQOI DAJUWDEQMA4 GA1UEBwwHSG 9lc3RvbjAeF w0xNDExMDYy MjI2MTIaFw0 xNTEwMDYy MjI2MTIaMF xEjAQBgNVBA MMCXNjc2tV LmRzZDELMAK GA1UEBhMCVVM xDzANBgNV BAoMBmNQYW5 lbDELMAKGA1 UECAwCVFgx E DA0BgNVBAcM B0hvdXN0b24 wggE1MA0G CSqGSIb3DQE</pre> |

ModSecurity:: enable_domains

ModSecurity:: has_modsecurity_installed

ModSecurity:: list_domains

▼ Mysql

Mysql:: add_host

Mysql:: add_host_note

Mysql:: check_database

Mysql:: create_database

Mysql:: create_user

Mysql:: delete_database

Mysql:: delete_host

Mysql:: delete_user

Mysql:: get_host_notes

Mysql:: get_privileges_on_database

Mysql:: get_restrictions

Mysql:: get_server_information

Mysql:: locate_server

Mysql:: rename_database

Mysql:: rename_user

Mysql:: repair_database

Mysql:: revoke_access_to_database

Mysql:: set_password

Mysql:: set_privileges_on_database

▼ Notifications

Notifications:: get_notifications_count

▼ NVData

NVData:: get

NVData:: set

BAQUAA4IBDw
AwwgEKAoIBA
QC9zx6zGiHd
mWA0dKtoXmJ
iWXpZ9E3P
Xx3YHs jFEWW
7e5pH0vz+ jV
MzDmm5nsJ7R
XrAkZ01IvpI
pVLvoQFiJOW
VvkD+o9fW
voK1tWJS72F
SgPju+58mA2
ieBuc87A790
Pzuv1P3NR3z
FLA JUR99zkH
R1fpri/da
M3PBW08ET48
FWkyUlKoeZa
ULF67/+wrEi
Ngg+t1qhKOC
AB61PdNVkLa
SGHimksuC
+Czk8Kq9nuS
0E0TCnDt jJE
yJ455FUcaCf
cz1Tb8xkB/F
90Re74yTzD+
v1k0tFMG6
PLj/ajIwWgw
00qmQ8wX3NR
xkWgGz5kV01
wrVJarKQ5EY
Q3/mgvi0v6
dAgMBAAGj
UDBOMB0GA1U
dDgQWBBRw+w
KBo34+bgexj
Aa3EMDsgSCd
7zA fBgNVHSM
EGDAWgBRw
+wKBo34+bg
xjAa3EMDsgS
Cd7zAMBqNVH
RMEBTADAQH/
MA0GCSqGS Ib
3DQEBBQUA
A4IBAQCCHRXI
s53opzKM2rM
8Qe81cw524W
K6hqy2EWxZH
p78N7rU7/6D
Q/I3hv3Wh
cDDIO04I2/X
he88MLBaLoM
367Ya+vy7Ca
Lr14aLi/SfQ
szMA0ALBvMa
o+Fis01Vw
FYq/NLgSXw+
fgnpFskt8v8
iQZ+4Kaa18U
8e9sVgu8m0R
g07rzymleRi
IKpsKdlrh
/SD7LbSN7M7
TRL3QqF71tw
9sQhAAsQcRa
BBF21pdWrqh
iGZ+Eioo3hh
gwNavH2ag
qz78ddHwrFp
HFwrEeUk1Of
pPb76MYIce7
xIy/4oQNdG6
fOq41/FrajB
v+WkzDVPa
Km6z 7YmwfLN
/YMZBHXSR58
oOGP9W

- Quota:: get_quota_info
- Resellers:: list_accounts
- ResourceUsage:: get_usages
- Restore:: directory_listing
 - Restore:: get_users
 - Restore:: query_file_info
 - Restore:: restore_file
- Session:: create_temp_user
- SiteTemplates:: list_site_templates
 - SiteTemplates:: list_user_settings
 - SiteTemplates:: publish
- SpamAssassin:: clear_spam_box
 - SpamAssassin:: get_symbolic_test_names
 - SpamAssassin:: get_user_preferences
 - SpamAssassin:: update_user_preference
- SSH:: get_port
- SSL:: add_autossl_excluded_domains
 - SSL:: can_ssl_redirect
 - SSL:: check_shared_cert
 - SSL:: delete_cert
 - SSL:: delete_csr
 - SSL:: delete_key

```

:25:c1:42:0
c:cc:5d:c4:
d5:
c4:cf:df:\n
de:4c:7c:22
:99:ab:06:7
9:99:16:1e:
a7:49:5b:9b
:\n
89:97:18:3c
:1e:4b:c6:c
5:b5:b2:9d:
7d:be:b9:91
:\n
c6:08:38:7d
:dc:81:18:2
b:0c:2c:da:
29:f4:aa:a2
:\n
72:46:d9:c2
:68:31:89:5
1:ab:32:af:
7a:8d:9b:a7
:\n
d8:b8:b5:37
:21:03:91:1
d:4e:d8:fc:
f1:0e:1f:96
:\n
17:d6:90:25
:c1:3a:1a:7
6:4c:9e:2b:
7e:b9:9c:f5
:\n
86:0a:cf:ea
:
2f:eb:bc:33
:ee:69:49:b
9:c2:e6:a0:
\n
ef:ee:90:19
:4a:2a:64:7
e:ef:96:46:
7e:7d:e2:35
:\n
ec:d9:cf:34
:42:7a:3d:c
1:22:b9:68:
a2:b3:02:a3
:\n 7f:f5\n
Exponent:
65537
(0x10001)\n
X509v3
extensions:
\n
X509v3
Subject Key
Identifier:
\n
6A:A1:EA:62
:FB:B2:C4:A
C:04:B0:43:
DD:56:BE:8A
:8D:FA:16:D
3:F4\n
X509v3
Authority
Key
Identifier:
\n
keyid:6A:A1
:EA:62:FB:B
2:C4:AC:04:
B0:43:DD:56
:BE:8A:8D:F
A:16:D3:F4\
\n\n
X509v3
Basic
Constraints
: \n
CA:TRUE\n
Signature
Algorithm:
sha1WithRSA
Encryption\
n
3c:1e:f7:3d
:20:1b:a2:b
d:5c:d6:0f:
2a:9e:f3:b0
:83:bf:a9:\
n
a0:90:9b:96
:b1:a6:1e:8
b:be:7c:f5:
72:58:a0:48
:3e:68:
43:\n
06:37:63:0a
:cb:9c:23:9

```

SSL:: delete_ssl
SSL:: disable_mail_sni
SSL:: enable_mail_sni
SSL:: fetch_best_for_domain
SSL:: fetch_certificate_for_fqdns
SSL:: fetch_key_and_certificate_for_certificate
SSL:: find_certificates_for_key
SSL:: find_csrs_for_key
SSL:: generate_certificate
SSL:: generate_csr
SSL:: generate_key
SSL:: get_autossl_excluded_domains
SSL:: get_autossl_pending_queue
SSL:: get_autossl_problems
SSL:: get_certificate
SSL:: get_cn_name
SSL:: install_ssl
SSL:: installed_hosts
SSL:: installed_hosts
SSL:: is_autossl_check_in_progress
SSL:: is_mail_sni_supported
SSL:: is_sni_supported
SSL:: list_certs
SSL:: list_csrs
SSL:: list_keys
SSL:: list_ssl_items
SSL:: mail_sni_status

8:c6:9e:f1:
73:e8:4b:71:
:ac:07:fc:\n
d0:5c:e1:55:
:4f:be:a7:7
5:5a:57:da:
a1:c2:46:63:
:8f:3a:70:\n
n
4c:42:3c:03:
:4c:a0:47:a
3:fc:
ae:15:03:25:
:a5:78:63:a
2:73:\n
cd:47:d5:64:
:7c:d4:f5:8
5:f7:03:b8:
b4:d8:95:75:
:6a:78:5c:\n
n
e6:c7:69:02:
:7b:a4:fc:4
d:8c:80:7b:
c7:1c:71:04:
:ba:53:71:\n
n 7a:
ce:00:cb:0e:
:5e:21:89:0
2:ba:90:02:
8e:b5:79:8e:
:84:50:\n
b0:21:63:b0:
:ac:19:80:c
5:1d:a2:95:
68:b7:ee:35:
:10:fa:db:\n
n
f5:bf:b0:16:
:b1:34:76:f
2:d6:ee:07:
3b:6d:b6:0c:
:1d:b4:e5:\n
n
53:50:23:b8:
:c4:bf:fe:d
6:77:ec:89:
68:a0:d8:dd:
:f4:f5:fa:\n
n
7d:f6:c4:72:
:02:b1:e8:8
7:f7:e1:16:
71:80:2e:e7:
:94:7b:eb:\n
n
c6:a7:07:36:
:05:6d:34:b
4:25:74:e9:
c2:2c:9e:3d:
:bc:97:8e:\n
n
84:ce:cc:4f:
:1f:11:67:a
d:30:f6:83:
3e:be:bb:88:
:48:10:65:\n

- tus
- SSL:: rebuild_mail_sni_config
- SSL:: rebuildssldb
- SSL:: remove_autosslexcludeddomains
- SSL:: set_autosslexcludeddomains
- SSL:: set_cert_friendly_name
- SSL:: set_csrfriendly_name
- SSL:: set_key_friendly_name
- SSL:: set_primary_ssl
- SSL:: set_ssl_share
- SSL:: show_cert
- SSL:: show_csr
- SSL:: show_key
- SSL:: start_autossl_check
- SSL:: toggle_ssl_redirects_for_domains
- SSL:: upload_cert
- SSL:: upload_key
- ▼ StatsBar
 - StatsBar:: get_stats
- ▼ Styles
 - Styles:: current
 - Styles:: list
 - Styles:: set_default
 - Styles:: update
- ▼ SubDomain
 - SubDomain:: addsubdomain
- ▼ Themes
 - Themes:: get_theme_base
 - Themes:: list
 - Themes:: update
- ▼ Tokens
 - Tokens:: create_full_access
 - Tokens:: list

| | | | | |
|---------------------|---------|---|--|-------------------------------|
| | | | | <pre> n f7:4b:2f:80 \n </pre> |
| details | hash | <p>A hash of the certificate's details.</p> <p>This hash includes the <code>is_self_signed</code>, <code>modulus</code>, <code>notbefore</code>, <code>notafter</code>, <code>domains</code>, and <code>key_algorithm</code>, <code>signature_algorithm</code>, and <code>validation_type</code> returns and the subject and issuer hashes.</p> | | |
| is_self_signed | Boolean | <p>Whether the certificate is self-signed.</p> <p>The function returns this value in the details hash.</p> | <ul style="list-style-type: none"> • 1 — Self-signed. • 0 — Not self-signed. | 1 |
| validation_type | string | <p>The certificate's validation type.</p> <div style="border: 1px solid orange; padding: 5px; margin: 10px 0;"> <p>Note: We introduced this return in cPanel & WHM version 56.</p> </div> <p>The function returns this value in the details hash.</p> | <ul style="list-style-type: none"> • ev — Extended Validation. • ov — Organization Validation. • dv — Domain Validation. • undef — The system could not parse and determine the certificate's validation type. | dv |
| signature_algorithm | string | <p>The signature algorithm of the certificate.</p> <div style="border: 1px solid orange; padding: 5px; margin: 10px 0;"> <p>Note: We introduced this return in cPanel & WHM version 56.</p> </div> <p>The function returns this value in the details hash.</p> | <p>A valid OID hash algorithm name.</p> | sha256WithRSAEncryption |
| subject | hash | <p>A hash of the certificate's ownership details.</p> <p>The function returns this hash in the details hash.</p> | <p>This hash includes the <code>commonName</code>, <code>stateOrProvinceName</code>, <code>organizationName</code>, <code>emailAddress</code>, <code>countryName</code>, and <code>localityName</code> returns.</p> | |
| commonName | string | <p>The certificate's Common Name or Distinguished Name.</p> <p>The function returns this value in the subject hash.</p> | <p>A valid domain name.</p> | example.com |
| stateOrProvinceName | string | <p>The certificate's state or province name.</p> <p>The function returns this value in the subject hash.</p> | <p>A valid string.</p> | Texas |

Tokens:: rename

Tokens:: revoke

TwoFactorAuth

TwoFactorAuth:: generate_user_configuration

TwoFactorAuth:: get_user_configuration

TwoFactorAuth:: remove_user_configuration

TwoFactorAuth:: set_user_configuration

UserManager

UserManager:: check_account_conflicts

UserManager:: create_user

UserManager:: delete_user

UserManager:: dismiss_user

UserManager:: edit_user

UserManager:: list_users

UserManager:: lookup_service_account

UserManager:: lookup_user

UserManager:: merge_service_account

UserManager:: unlink_service_account

UserTasks

UserTasks:: delete

UserTasks:: retrieve

VersionControl

VersionControl:: create

VersionControl:: delete

VersionControl:: retrieve

VersionControl:: update

VersionControlDepl

| | | | | |
|------------------|--------|--|--|--|
| organizationName | string | The certificate's organization name. The function returns this value in the subject hash. | A valid string. | Organization |
| emailAddress | string | The certificate's email address. The function returns this value in the subject hash. | A valid email address. | username@example.com |
| countryName | string | The certificate's country. The function returns this value in the subject hash. | A valid two-letter ISO-3166 country code. | US |
| localityName | string | The certificate's locality or city. The function returns this value in the subject hash. | A valid string. | Houston |
| modulus | string | The certificate's modulus. The function returns this value in the details hash. | A valid string. | Click to view... a74f7636fa6ac93ee6836a83a995b55deb5019ea36d7ba3dafb00e38d693acdb0c81b2ff77d6b433a420fae523f127f352a68bcc8b8f2d6ee7b70395bafabd8237ada8164fdddf8376b30375c35d4d4cbce7d33d08069c17b409176a3689f1ebc97c0b08fe6ae44c19a92ac6d68448e7f1d13f3b360affd4222a51b4f35342de99b5a1fb5548e438f2d824664562a448002eed7fce24dedc7dc3e1ed179973d1dae959b33716eeb410d172708954e00632cbf60a0e26419860c8c0bc285d6bfe4b479de0dd189772a5dae676bd2a92acccc1369821be8cffddd8a7e6ecc061f8a32a9ae0661e4e946ed8e3827b277138d3a76116567cbd129cbd869ef9dddf |
| issuer | hash | A hash of the issuer's details. The function returns this value in the details hash. | This hash includes the commonName, stateOrProvinceName, organizationName, emailAddress, countryName, and localityName returns. | |
| commonName | string | The issuer's Common Name or Distinguished Name. The function returns this value in the issuer hash. | A valid domain name. | example.com |

oyment

VersionControlDeployment:: **create**

VersionControlDeployment:: **delete**

VersionControlDeployment:: **retrieve**

WebDisk

WebDisk:: **delete_user**

WebDisk:: **set_home_dir**

WebDisk:: **set_password**

WebDisk:: **set_permissions**

WebmailApps

WebmailApps:: **list_webmailapps**

WebVhosts

WebVhost:: **list_domains**

WebVhost:: **list_ssl_capable_domains**

WordPressBackup

WordPressBackup:: **any_running**

WordPressBackup:: **cancel**

WordPressBackup:: **cleanup**

WordPressBackup:: **get_available_backups**

WordPressBackup:: **is_running**

WordPressBackup:: **start**

WordPressInstanceManager

WordPressInstanceManager:: **cancel_scan**

WordPressInstanceManager:: **cleanup_scan**

WordPressInstanceManager:: **change_admin_password**

WordPressInstanceManager:: **configure_autoupdate**

WordPressInstanceManager:: **get_ap**

| | | | | |
|---------------------|---------|---|---|---|
| stateOrProvinceName | string | The issuer's state or province name. The function returns this value in the issuer hash. | A valid string. | Texas |
| organizationName | string | The issuer's organization name. The function returns this value in the issuer hash. | A valid string. | Organization |
| emailAddress | string | The issuer's email address. The function returns this value in the issuer hash. | A valid email address. | username@example.com |
| countryName | string | The certificate's country. The function returns this value in the issuer hash. | A valid two-letter ISO-3166 country code. | US |
| localityName | string | The issuer's locality or city. The function returns this value in the issuer hash. | A valid string. | Houston |
| notBefore | integer | The certificate's start time. The function returns this value in the details hash. | A date in Unix time format. | 1365633490 |
| notAfter | integer | The certificate's expiration time. The function returns this value in the details hash. | A date in Unix time format. | 1397169490 |
| domains | string | The certificate's domains or list of domains. The function returns this value in the details hash. | A valid domain or list of domains. | example.com |
| keyAlgorithm | string | The certificate's method of encryption. The function returns this value in the details hash. | A valid string. | rsaEncryption |
| id | string | The certificate's ID. | A valid string. | Click to view... example_com_c69ce_37ff5_1397169490_169c717cb2c260281df792788accf041 |
| friendlyName | string | The certificate's friendly name. | A valid string. | TestCert |

i_version

WordPressInstanceManager:: **get_instance_by_id**

WordPressInstanceManager:: **get_instances**

WordPressInstanceManager:: **get_latest_wordpress_version_from_wordpress_org**

WordPressInstanceManager:: **get_scan_results**

WordPressInstanceManager:: **is_installable_addon_available**

WordPressInstanceManager:: **start_scan**

▼ WordPressRestore

WordPressRestore:: **any_running**

WordPressRestore:: **cleanup**

WordPressRestore:: **start**