

Use WHM API to Call cPanel API and UAPI

Guide to WHM API 1

- Return Data
- Filter Output
- Sort Output
- Paginate Output
- Output Columns
- Call cPanel API 2 and UAPI

- Account Restoration
- restore_modules_summary
- restore_queue_activate
- restore_queue_add_task
- restore_queue_clear_all_completed_tasks
- restore_queue_clear_all_failed_tasks
- restore_queue_clear_all_pending_tasks
- restore_queue_clear_all_tasks
- restore_queue_clear_completed_task
- restore_queue_clear_pending_task
- restore_queue_is_active
- restore_queue_list_active
- restore_queue_list_completed
- restore_queue

Introduction

You can call cPanel API and UAPI functions through the WHM API.


Note:
We introduced this feature in cPanel & WHM version 11.48.

This method is useful, for example, when you develop plugins for WHM users, particularly resellers, but need to access cPanel functions. You can make these calls from within either the WHM or cPanel interfaces.

For more information about WHM API calls, read our [Guide to WHM API 1](#) documentation.

Basic usage

WHM API calls consist of the following basic parts:

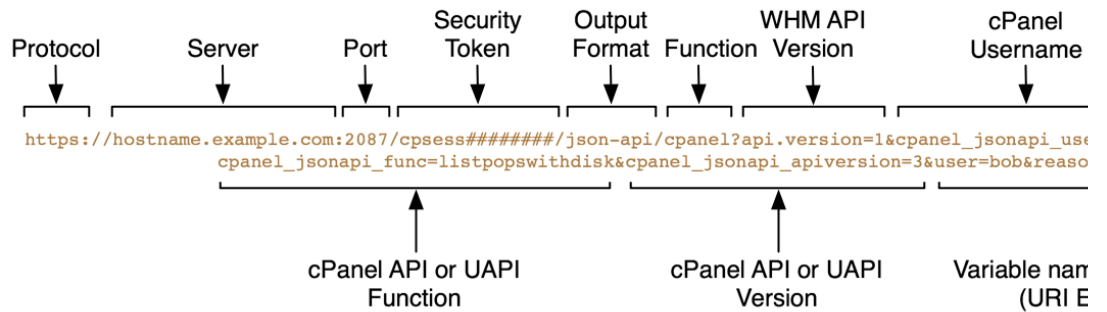

Item	Description	Example
Server	The web server's HTTP address. Generally, this value is <code>https://</code> and the hostname.	<code>https://hostname.example.com</code>

WHM API 1 Basics

WHM API 1 performs functions and accesses data in WHM.

Notes:

- Scro
- Yc
- mi
- us
- 20
- or
- 20
-) t

Related Documentation

ue_list_pending
 restore_queue_state
 restoreaccount
 verify_new_username_for_restore

▼ Accounts

accountsummary
 applist
 createacct
 domainuserdata
 editquota
 forcepasswordchange
 get_disk_usage
 get_domain_info
 getdomainowner
 has_digest_auth
 has_myconf_for_cpuser
 limitbw
 list_users
 listaccts
 listlockedaccounts
 listsuspended
 modifyacct
 myprivs
 passwd
 quota_enabled
 removeacct
 set_digest_auth
 showbw
 suspendacct
 unsuspendacct
 untrack_acct

Port	<p>The port number to access.</p> <ul style="list-style-type: none"> 2087 — Secure connection. 2086 — Insecure connection. <div style="border: 1px solid orange; padding: 5px; margin-top: 10px;"> <p>Notes:</p> <ul style="list-style-type: none"> We strongly recommend that you use port 2087 and a secure connection. If you use port 2086 and enable the <i>Always redirect to SSL</i> option in WHM's <i>Tweak Settings</i> in <i>Interface (WHM >> Home >> Server Configuration >> Tweak Settings)</i>, the system redirects insecure API calls and causes errors. </div>	2087
Security Token	The current session's security token.	cpsess123456789

- [Guide to WHM API 1 — WHM API 1 accesses the WHM interface's features.](#)
- [WHM API 1 - Filter Output](#) — You can use additional variables to filter WHM API 1 output.
- [WHM API 1 - Sort Output](#) — You can use additional variables to sort WHM API 1 output.

- _id
- verify_new_username
- ▼ Addon Domains
 - convert_addon_fetch_conversion_details
 - convert_addon_fetch_domain_details
 - convert_addon_get_conversion_status
 - convert_addon_initiate_conversion
 - convert_addon_list_addon_domains
 - convert_addon_list_conversions
- ▼ Authentication
 - api_token_create
 - api_token_list
 - api_token_revoke
 - api_token_update
 - disable_authentication_provider
 - disable_failing_authentication_providers
 - enable_authentication_provider
 - get_available_authentication_providers
 - get_login_url
 - get_provider_client_configurations
 - get_provider_configuration_fields
 - get_provider_display_co

	<p><i>Output format</i></p> <p>The output type to return.</p> <ul style="list-style-type: none"> • Use <code>json-api</code> to return JavaScript Object Notation (JSON). • Use <code>xml-api</code> to return Extensible Markup Language (XML). <div style="border: 1px solid red; padding: 5px; margin: 10px 0;"> <p>Important:</p> <ul style="list-style-type: none"> • This API's XML output does not comply with XML standards, is slower than JSON output to produce, and may result in validation errors. We strongly recommend that you use JSON. • cPanel & WHM version 66 deprecated XML output. • You must use the correct JSON or XML versions of the <i>cPanel User, cPanel API or UAPI Module, cPanel API or UAPI Function</i>, and <i>cPanel API Version</i> parameters below. </div>	<p><code>json-api</code></p> <p>or</p> <p><code>xml-api</code></p>
<p><i>Function</i></p>	<p>The WHM API function to call. For cPanel API1, cPanel API2, and UAPI, use the <code>cpanel</code> function.</p>	<p><code>cpanel</code></p>

- WHM API 1 - Paginate Output — You can use additional variables to paginate WHM API 1 output.
- WHM API 1 - Return Data — WHM API 1 outputs data in either JSON or XML format.

nfigurations
 get_users_authn_linked_accounts
 link_user_authn_provider
 set_provider_client_configurations
 set_provider_display_configurations
 twofactorauth_disable_policy
 twofactorauth_enable_policy
 twofactorauth_generate_tfa_config
 twofactorauth_get_issuer
 twofactorauth_get_user_configs
 twofactorauth_policy_status
 twofactorauth_remove_user_config
 twofactorauth_set_issuer
 twofactorauth_set_tfa_config
 unlink_user_authn_provider
 validate_login_token

▼ Backups

backup_config_get
 backup_config_set
 backup_data_list
 backup_destination_add
 backup_destination_delete

<p><i>cPanel User</i></p>	<p>The cPanel username for the account through which to call the function.</p> <p>Make certain that you specify the username in lowercase characters only. cPanel & WHM automatically converts usernames to lowercase when you create a cPanel account. For this reason, if you supply a username that includes some or all capital letters, the call will fail.</p>	<p><code>cpanel_jsonapi_user=user</code></p> <p>or</p> <p><code>cpanel_xmlapi_user=user</code></p>
<p><i>cPanel API or UAPI Module</i></p>	<p>The UAPI module name.</p> <div data-bbox="683 611 922 758" style="border: 1px solid red; padding: 5px;"> <p>Important: Module names are case-sensitive.</p> </div>	<p><code>cpanel_jsonapi_module=Email</code></p> <p>or</p> <p><code>cpanel_xmlapi_module=Email</code></p>
<p><i>cPanel API or UAPI Function</i></p>	<p>The UAPI function name.</p> <div data-bbox="683 848 922 995" style="border: 1px solid red; padding: 5px;"> <p>Important: Function names are case-sensitive.</p> </div>	<p><code>cpanel_jsonapi_function=listpopswithdisk</code></p> <p>or</p> <p><code>cpanel_xmlapi_function=listpopswithdisk</code></p>
<p><i>cPanel API Version</i></p>	<p>The cPanel API version to use.</p> <ul style="list-style-type: none"> • 1 — Use cPanel API 1. • 2 — Use cPanel API 2. • 3 — Use UAPI. <div data-bbox="683 1255 922 1478" style="border: 1px solid red; padding: 5px;"> <p>Warning: If you do not supply this parameter, the system defaults to cPanel API 2.</p> </div>	<p><code>cpanel_jsonapi_api_version=3</code></p> <p>or</p> <p><code>cpanel_xmlapi_version=3</code></p>

backup_dest
 ination_get

 backup_dest
 ination_list

 backup_dest
 ination_set

 backup_dest
 ination_valid
 ate

 backup_get
 _transport_s
 tatus

 backup_list_
 transported

 backup_set_
 list

 backup_set_
 list_combine
 d

 backup_skip
 _users_all

 backup_skip
 _users_all_s
 tatus

 backup_use
 r_list

 convert_and
 _migrate_fro
 m_legacy_c
 onfig

 get_users_w
 ith_backup_
 metadata

 list_cparchiv
 e_files

 start_backgr
 ound_pkgac
 ct

 toggle_user
 _backup_sta
 te

▼ cPHulk

cphulk_statu
 s

 create_cphu
 lk_record

 delete_cphu
 lk_record

 disable_cph
 ulk

 enable_cph
 ulk

 flush_cphulk
 _login_histo
 ry

<p><i>Variable Names and Values</i></p>	<p>The function's input parameters and their values.</p> <div data-bbox="680 233 920 665" style="border: 1px solid orange; padding: 5px;"> <p>Notes:</p> <ul style="list-style-type: none"> • Separate multiple parameter=value pairs with the ampersand character (&). • You must URI-encode these values. </div>	<p>domain=example.com</p>
---	--	---------------------------

flush_cphulk
_login_histo
ry_for_ips

get_countrie
s_with_kno
wn_ip_rang
es

get_cphulk_
brutes

get_cphulk_
excessive_b
rutes

get_cphulk_
failed_logins

get_cphulk_
user_brutes

load_cphulk
_config

read_cphulk
_records

save_cphulk
_config

set_cphulk_
config_key

▼ Databases

background
_mysql_upg
rade_status

current_mys
ql_version

installable_
mysql_versi
ons

latest_availa
ble_mysql_v
ersion

list_databas
e_users

list_databas
es

list_mysql_d
atabases_a
nd_users

remote_mys
ql_create_pr
ofile

remote_mys
ql_create_pr
ofile_via_ss
h

remote_mys
ql_delete_pr
ofile

remote_mys
ql_initiate_p
rofile_activat

ion

remote_mysql_monitor_profile_activation

remote_mysql_read_profile

remote_mysql_read_profiles

remote_mysql_update_profile

remote_mysql_validate_profile

rename_mysql_database

rename_mysql_user

rename_postgresql_database

rename_postgresql_user

set_local_mysql_root_password

set_mysql_password

set_postgresql_password

start_background_mysql_upgrade

▼ DNS

adddns

addzonerecord

addzonerecord (Reverse DNS)

dumpzone

editzonerecord

get_nameserver_config

getzonerecord

has_local_authority

killdns
listmxs
listzones
lookupnsip
lookupnsips
removezone
record
resetzone
resolvedom
ainname
savemxs
setresolvers
update_nam
eservers_co
nfig

▼ EasyApache

ea4_get_cur
rently_install
ed_packages

ea4_get_ea
_pkgs_state

ea4_list_pro
files

ea4_metainf
o

ea4_migrati
on

ea4_pre_mi
grate_check

ea4_recom
mendations

ea4_save_p
rofile

ea4_tomcat
85_add

ea4_tomcat
85_list

ea4_tomcat
85_rem

▼ Greylisting

cpgreylist_is
_server_net
block_truste
d

cpgreylist_li
st_entries_f
or_common
_mail_provid
er

cpgreylist_lo
ad_common
_mail_provid

ers_config

cpgreylist_s
ave_commo
n_mail_provi
ders_config

cpgreylist_st
atus

cpgreylist_tr
ust_entries_
for_common
_mail_provid
er

cpgreylist_u
ntrust_entrie
s_for_comm
on_mail_pro
vider

create_cpgr
eylist_truste
d_host

delete_cpgr
eylist_truste
d_host

disable_cpgr
eylist

enable_cpgr
eylist

load_cpgreyl
ist_config

read_cpgrey
list_deferred
_entries

read_cpgrey
list_trusted_
host

save_cpgrey
list_config

▼ Integration

batch

cpanel

create_integ
ration_group

create_integ
ration_link

get_integrati
on_link_user
_config

list_integrati
on_groups

list_integrati
on_links

remove_inte
gration_grou
p

remove_inte

gration_link

update_inte
gration_link
_token

▼ IP Addresses

addips

delip

get_public_i
p

get_shared_
ip

ipv6_disable
_account

ipv6_enable
_account

ipv6_range_
add

ipv6_range_
edit

ipv6_range_
list

ipv6_range_
remove

ipv6_range_
usage

listips

nat_checkip

nat_set_pub
lic_ip

setsiteip

▼ Mail

disable_dki
m

disable_mail
_sni

emailtrack_s
earch

emailtrack_s
tats

emailtrack_u
ser_stats

enable_dkim

enable_mail
_sni

ensure_dki
m_keys_exi
st

exim_config
uration_che
ck

expunge_m

ailbox_messages
expunge_messages_for_mailbox_guid
fetch_dkim_private_keys
fetch_mail_queue
generate_mobileconfig
get_mailbox_status
get_mailbox_status_list
get_unique_recipient_count_per_sender_for_user
get_unique_sender_recipient_count_per_user
get_user_email_forward_destination
hold_outgoing_email
install_dkim_private_keys
install_spf_records
is_sni_supported
list_pops_for
mail_sni_status
rebuild_mail_sni_config
release_outgoing_email
save_spamd_config
set_user_email_forward_destination
suspend_outgoing_email
unsuspend_outgoing_email

validate_currency_installed_exim_config

validate_currency_dkims

validate_currency_ptrs

validate_currency_spfs

validate_exim_configuration_syntax

▼ Market

disable_market_provider

enable_market_provider

get_adjusted_market_providers_products

get_market_providers_commission_config

get_market_providers_list

get_market_providers_product_metadata

get_market_providers_products

set_market_product_attribute

set_market_provider_commission_id

▼ ModSecurity™

modsec_add_rule

modsec_add_vendor

modsec_assemble_config_text

modsec_batch_settings

modsec_check_rule

modsec_clone_rule

modsec_de
ploy_all_rule
_changes

modsec_de
ploy_rule_ch
anges

modsec_de
ploy_setting
s_changes

modsec_dis
able_rule

modsec_dis
able_vendor

modsec_dis
able_vendor
_configs

modsec_dis
able_vendor
_updates

modsec_dis
card_all_rul
e_changes

modsec_dis
card_rule_c
hanges

modsec_edit
_rule

modsec_en
able_vendor

modsec_en
able_vendor
_configs

modsec_en
able_vendor
_updates

modsec_get
_config_text

modsec_get
_configs

modsec_get
_configs_wit
h_changes_
pending

modsec_get
_log

modsec_get
_rules

modsec_get
_settings

modsec_get
_vendors

modsec_is_i
nstalled

modsec_ma
ke_config_a
ctive

modsec_make_config_inactive

modsec_preview_vendor

modsec_remove_rule

modsec_remove_setting

modsec_remove_vendor

modsec_report_rule

modsec_set_config_text

modsec_set_setting

modsec_disable_rule

modsec_update_vendor

▼ Packages

_getpkgextensionform

add_override_features_for_user

addpkg

addpkgext

changepackage

create_feature_relist

delete_feature_relist

delpkgext

editpkg

get_available_applications

get_available_featurelists

get_feature_metadata

get_feature_names

get_featurelist_data

get_featureli

sts

get_users_f
eatures_sett
ings

getfeaturelis
t

getpkginfo

killpkg

listpkgs

manage_fea
tures

matchpkgs

read_feature
list

remove_ove
rride_featu
res_for_user

update_feat
urelist

verify_user_
has_feature

▼ PHP

convert_all_
domains_to
_fpm

get_fpm_co
unt_and_util
ization

is_conversio
n_in_progre
ss

php_get_def
ault_accoun
ts_to_fpm

php_get_ha
ndlers

php_get_im
pacted_dom
ains

php_get_ins
talled_versio
ns

php_get_old
_fpm_flag

php_get_sys
tem_default
_version

php_get_vh
osts_by_ver
sion

php_get_vh
ost_versions

php_ini_get
_content

php_ini_get
_directives

php_ini_set
_content

php_ini_set
_directives

php_set_def
ault_accoun
ts_to_fpm

php_set_ha
ndler

php_set_old
_fpm_flag

php_set_ses
sion_save_p
ath

php_set_sys
tem_default
_version

php_set_vh
ost_versions

▼ Resellers

acctcounts

get_public_c
ontact

getresellerip
s

listacIs

listresellers

resellerstats

saveacllist

set_public_c
ontact

setacIs

setresellerip
s

setresellerli
mits

setresellerm
ainip

setresellern
ameservers

setresellerp
ackagelimit

setupreselle
r

suspendres
eller

terminateres
eller

unsetuprese

ller

unsuspendr
eseller

▼ RPM

delete_rpm_
version

edit_rpm_ve
rsion

get_rpm_ver
sion_data

install_rpm_
plugin

list_rpms

package_m
anager_fixc
ache

package_m
anager_get_
build_log

package_m
anager_get_
package_inf
o

package_m
anager_is_p
erforming_a
ctions

package_m
anager_list_
packages

package_m
anager_reso
lve_actions

package_m
anager_sub
mit_actions

package_m
anager_upgr
ade

uninstall_rp
m_plugin

▼ Script Hooks

delete_hook

edit_hook

list_hooks

reorder_hoo
ks

▼ Security

accesshash

authorizessh
key

check_remo
te_ssh_conn
ection

convertopen
sshtoputty

deletesshke
y

fetch_securi
ty_advice

generatessh
keypair

importsshke
y

listsshkeys

▼ Server

Administration

add_configcl
usterserver

configureba
ckgroundpro
cesskiller

configureser
vice

cors_proxy_
get

create_user
_session

delete_confi
gclusterserv
er

enable_mon
itor_all_ena
bled_service
s

get_all_cont
act_importa
nces

get_appconf
ig_applicatio
n_list

get_applicati
on_contact_
event_import
tance

get_applicati
on_contact_
importance

get_availabl
e_profiles

get_current_
profile

get_passwor
d_strength

get_remote_
access_has
h

get_service_
config

get_service_
config_key

get_tcp4_so
ckets

get_tcp6_so
ckets

get_tweakse
tting

get_udp4_s
ockets

get_udp6_s
ockets

get_update_
availability

get_users_li
nks

getdiskusag
e

gethostname

is_role_ena
bled

list_configcl
usterservers

loadavg

nvget

nvset

personalizati
on_get

personalizati
on_set

purchase_a
_license

reboot

remove_in_
progress_ex
im_config_e
dit

restartservic
e

restore_conf
ig_from_file

restore_conf
ig_from_upl
oad

run_cpkeyclt

send_test_p
osturl

send_test_p
ushbullet_n
ote

servicestatu

s

set_applicati
on_contact_
event_imp
ortance

set_applicati
on_contact_
importance

set_primary
_servernam
e

set_service_
config_key

set_tweakse
tting

sethostname

setminimum
passwordstr
engths

start_profile
_activation

system_nee
ds_reboot

systemloada
vg

update_conf
igclusterserv
er

update_cont
act_email

verify_aim_a
ccess

verify_icq_a
ccess

verify_oscar
_access

verify_postu
rl_access

verify_pushb
ullet_access

▼ SSL

disable_aut
ossl

fetch_servic
e_ssl_comp
onents

fetch_ssl_ce
rtificates_for
_fqdns

fetch_ssl_vh
osts

fetch_vhost
_ssl_compo
nents

fetchcrtinfo
fetchsslinfo
generatessl
get_autossl
_check_schedule
get_autossl
_log
get_autossl
_logs_catalog
get_autossl
_metadata
get_autossl
_pending_queue
get_autossl
_pending_queue_for_domain
get_autossl
_pending_queue_for_user
get_autossl
_problems_for_domain
get_autossl
_problems_for_user
get_autossl
_providers
get_best_ssl
domain_for_service
install_service_ssl_certificate
installssl
listcrts
rebuildinstall
edssldb
rebuildusers
sldb
reset_autossl_provider
reset_service_ssl_certificate
set_autossl_metadata
set_autossl_metadata_key

set_autossl_
provider

start_autossl_
check_for_
all_users

start_autossl_
check_for_
one_user

▼ Styles and Themes

generate_cp
anel_plugin

list_styles

load_style

remove_log
o

remove_styl
e

save_style

set_default

▼ Support Tickets

ticket_creat
e_stub_ticke
t

ticket_get_s
upport_agre
ement

ticket_get_s
upport_info

ticket_grant

ticket_list

ticket_remov
e_closed

ticket_revok
e

ticket_ssh_t
est

ticket_ssh_t
est_start

ticket_updat
e_service_a
greement_a
pproval

ticket_valida
te_oauth2_c
ode

ticket_whitel
ist_check

ticket_whitel
ist_setup

ticket_whitel
ist_unsetup

▼ Transfers

abort_transf
er_session

analyze_tra
nsfer_sessio
n_remote

available_tr
ansfer_mod
ules

create_remo
te_root_tran
sfer_session

create_remo
te_user_tran
sfer_session

delete_accou
nt_archives

enqueue_tra
nsfer_item

fetch_transf
er_session_l
og

get_transfer
_session_st
ate

pause_trans
fer_session

remote_basi
c_credential
_check

retrieve_tran
sfer_session
_remote_an
alysis

start_transfe
r_session

transfer_mo
dule_schem
a

validate_sys
tem_user

▼ Updates

accept_eula

get_availabl
e_tiers

get_current_
lts_expiratio
n_status

get_lts_wex
pire

getlongterm
support

installed_ver
sions

set_cpanel_
updates

set_tier

update_upd
ateconf

version