

# Manage Hooks

For cPanel & WHM version 66

( Home >> Development >> Manage Hooks )

- [Overview](#)
- [Available hooks](#)
- [Additional documentation](#)

## Overview

This interface allows you to perform a variety of actions on the hooks that exist on your server. By default, the interface sorts hooks by the hook type (for example, `PkgAcct`) and then by the order in which they run.

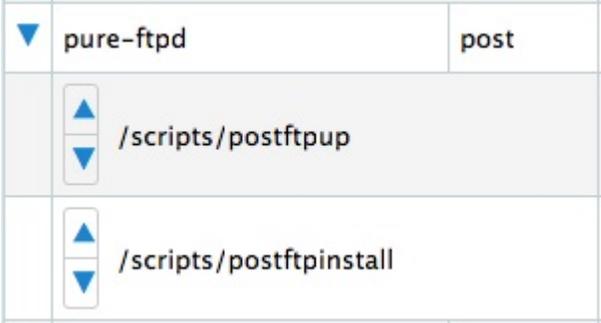


### Notes:

- To search for a specific hook, enter the name of that hook in the *Search* text box.
- To hide all of the hooks' attributes and actions, click *Collapse All*.
- To show all of the hooks' attributes and actions, click *Expand All*.
- You **must** create and edit hooks on the command line. For more information, read our [Guide to Standardized Hooks](#) documentation.

## Available hooks

The table of hooks lists the following information about each hook:

Column	Description
<i>Event/Hook</i>	<ul style="list-style-type: none"><li>The first row in this column lists the hook's event. For more information, read our <a href="#">Hookable Events</a> documentation.</li><li>The second row in this column lists the hook's location.</li><li>To change the order in which a hook executes, click the up or down arrows next to the hook's location.</li></ul>  <p><i>In this example, pure-ftp is the hook action, and /scripts/postftpup and /scripts/postftpinstall are the locations for the hook.</i></p>
<i>Stage</i>	When the hook executes (for example, <code>pre</code> ). For more information, read our <a href="#">Guide to Standardized Hooks</a> documentation.
<i>Description /Notes</i>	The unique identifier for the hook.

<i>Attributes</i>	<p>The <i>Attributes</i> icons indicate the status of the hook:</p> <table border="1" data-bbox="263 182 1458 613"> <thead> <tr> <th data-bbox="263 182 376 235">Symbol</th> <th data-bbox="376 182 1458 235">Description</th> </tr> </thead> <tbody> <tr> <td data-bbox="263 235 376 304"></td> <td data-bbox="376 235 1458 304">A blue icon indicates that the hook blocks certain actions. For example, a hook may block the creation of a new account.</td> </tr> <tr> <td data-bbox="263 304 376 392"></td> <td data-bbox="376 304 1458 392">A blue icon indicates that the hook is active.</td> </tr> <tr> <td data-bbox="263 392 376 462"></td> <td data-bbox="376 392 1458 462">A blue icon indicates that the <code>root</code> user must run the hook.</td> </tr> <tr> <td data-bbox="263 462 376 531"></td> <td data-bbox="376 462 1458 531">A blue icon indicates that the hook checks for a specified condition (a check action) before it runs.</td> </tr> <tr> <td data-bbox="263 531 376 613"></td> <td data-bbox="376 531 1458 613">A blue icon indicates that a subroutine or script executes if the hook fails.</td> </tr> </tbody> </table>	Symbol	Description		A blue icon indicates that the hook blocks certain actions. For example, a hook may block the creation of a new account.		A blue icon indicates that the hook is active.		A blue icon indicates that the <code>root</code> user must run the hook.		A blue icon indicates that the hook checks for a specified condition (a check action) before it runs.		A blue icon indicates that a subroutine or script executes if the hook fails.
Symbol	Description												
	A blue icon indicates that the hook blocks certain actions. For example, a hook may block the creation of a new account.												
	A blue icon indicates that the hook is active.												
	A blue icon indicates that the <code>root</code> user must run the hook.												
	A blue icon indicates that the hook checks for a specified condition (a check action) before it runs.												
	A blue icon indicates that a subroutine or script executes if the hook fails.												
<i>Actions</i>	<p>You can perform the following actions for each hook:</p> <ul style="list-style-type: none"> <li>• <i>Details</i> — Opens a separate window that displays all of the hook's information.</li> </ul> <div data-bbox="310 726 1482 835" style="border: 1px solid #ccc; padding: 10px; background-color: #fff9c4;"> <p> <b>Note:</b> Changes to the contents of the <i>Notes</i> text box do <b>not</b> change the functionality of the hook.</p> </div> <ul style="list-style-type: none"> <li>• <i>Disable</i> or <i>Enable</i> — Disables or enables the hook.</li> <li>• <i>Delete</i> — Deletes the hook. Click <i>Proceed</i> to confirm that you wish to delete the hook.</li> </ul> <div data-bbox="310 926 1482 1052" style="border: 1px solid #ccc; padding: 10px; background-color: #ffe0e0;"> <p> <b>Warning:</b> If you delete a hook, you may break applications that depend on that hook to function. If you are unsure whether any applications depend on the hook, use the <i>Disable</i> option instead.</p> </div>												

## Additional documentation

- [Manage Hooks](#)